

# TECHNICAL DATA SHEET • SPECIFICATIONS


## ROOF HATCH

Interior and exterior handle, heavy-duty pintle hinge

TRH-00

### INSTALLATION

Technical drawing TRH-00

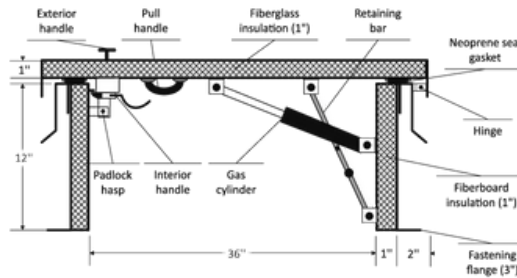

### STANDARD DIMENSIONS AND APPEARANCE


| Dimensions • W X H |           | Number of locks | Weight |      |
|--------------------|-----------|-----------------|--------|------|
| inches             | mm        |                 | lbs    | KG   |
| 36 x 30            | 914 x 762 | 1               | 178.0  | 81.0 |
| 36 x 36            | 914 x 914 | 1               | 188.0  | 85.0 |

Your odd sizes: Made in 10 days

Rough opening is size of roof hatch

### OTHER TECHNICAL INFORMATION

Leed®: When painted white, the TRH could contribute to meeting SSc7.2 (Heat Island Effect) requirements for highly reflective roofing materials.

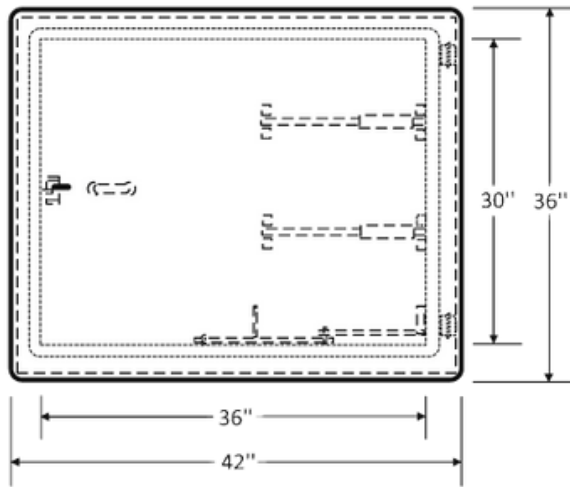

### DESCRIPTION AND MATERIAL SPECIFICATION

|                     |   |
|---------------------|---|
| <b>Material</b>     | 14-gauge galvalneal steel   |
| <b>Hinge</b>        | Heavy-duty pintle hinge, located on the second dimension (height) |
| <b>Lock / Latch</b> | Interior and exterior handle activating a slam latch              |
| <b>Finish</b>       | High-quality white powder coat primer                             |
| <b>Components</b>   | 2 gas cylinders, retaining bar                                    |
| <b>Cover</b>        | 14-gauge galvalneal steel with 1" fiberglass insulation           |
| <b>Curb</b>         | 14-gauge galvalneal steel with 1" fiberboard insulation           |
| <b>Gasketing</b>    | «D» foam adhesive gasket provides a flush and tight fit           |

### POPULAR OPTIONS

For complete list of options go to [cendrex.com](http://cendrex.com)

|                 |   |
|-----------------|---|
| <b>Material</b> | Aluminum (AL)                                   |
| <b>Other</b>    | Telescopic cylinder (-130), Security bar (-135) |



### PROJET DATA

|             |       |     |   |   |
|-------------|-------|-----|---|---|
| Project:    | Date: | QTY | W | H |
| Architech:  |       |     |   |   |
| Dealer:     |       |     |   |   |
| Contractor: |       |     |   |   |
| Location:   |       |     |   |   |

|   |
|---|
| Tagging instructions:                       |
| Special instructions:                       |
| Options:                                    |
| Submittal approval:<br>(Signature or stamp) |

## OPTIONS

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

### LOW SECURITY LOCKING MECHANISM



- 35** Screwdriver operated cam latch



- 220** Screwdriver operated cylinder Cam latch



- 80** Ring/tool key operated slam latch



- 55** Hex head slam latch and ring key operated slam latch



- 30** Slide latch



- 50** Allen hex head cam latch

### HANDLES



- 25** WITH KEY - 4" handle and key operated cam latch



- 100K** Key-operated recessed handle cam latch with cap over key path



- 20** WITHOUT KEY - 4" handle operated cam latch



- 22** WITHOUT KEY - 4" handle operated slam latch



- 21** WITHOUT KEY Fixed 4" handle



- 26** WITHOUT KEY - L handle

### MEDIUM SECURITY LOCKING MECHANISM



- 10** Key-operated cylinder cam latch



- 15** Mortise cam latch preparation
- 15C** Mortise cam latch preparation, keyed differently
- 15CKA** Mortise cam latch preparation, keyed alike



- 85** Mortise slam latch



- 85C** Mortise slam latch with cylinder
- 85CKA** Mortise slam latch cylinder keyed alike



- 90** Pinned hex head cam latch



- C** Cylinder cam latch, keyed differently



- CKA** Cylinder cam latch, keyed alike

### MATERIALS



- GS** Galvanneal steel



- AL** Aluminum



- SS** Stainless steel



- CR** Cold rolled steel

### HIGH SECURITY LOCKING MECHANISM



- 40** Mortise deadbolt lock



- 40C** Mortise Deadbolt Lock with Cylinder, keyed differently



- 40CKA** Mortise deadbolt lock with cylinder, keyed alike



- 99** Inside release thumbturn for mortise deadbolt lock



- 45** Mortise preparation for detention deadbolt lock



- 46** Detention deadbolt lock



- 47** CIDetention deadbolt Key

### OTHERS



- 60** Gasket



- 160** Holding cable



- 240** Masonry anchors



- 130** Telescopic cylinder



- 135** Security bar